

كراون - شرائح فينيل فاخر

السريع للأرضيات والمفروشات


المواصفات التقنية

Loose Lay N/S type : 5mm thickness - CROWN BRAND

| | | |
|---------------------------|-------------------------|--------------------------------|
| TYPE & COMPOSITION | | PVC LAMINATED FLOOR COVERING |
| APPLICATION | | COMMERCIAL, RESIDENTIAL |
| SURFACE TREATMENT | | PU & ANTI-BACTERIAL PER DESIGN |
| TILE SIZE (MM) | EN 427, ASTM F2421 | 177.8x1219.2 |
| TOTAL THICKNESS (MM) | EN 428, ASTM F386 | 5.00 |
| WEAR LAYER THICKNESS (MM) | EN 429 | 0.55 |
| FIRE RATING | EN 13501-1 | Bfl - S1 |
| | MEKEL BURNER TEST | PASS |
| SLIP RESISTANCE | EN 13893 | PASS |
| RESIDUAL INDENTATION | EN 433 | ≤0.10mm |
| COLOR FASTNESS | ISO 105-B02, ASTM F1514 | ≥6 |
| DIMENSIONAL STABILITY | EN 434 | ≤0.25% |
| FLEXIBILITY | EN 435, ASTM F137 | NO CRACK WAS FOUND |
| ELECTRICAL BEHAVIOR | EN 1081 | PASS |

Looselay-NS

Environment-friendly luxury vinyl tiles (Glueless)

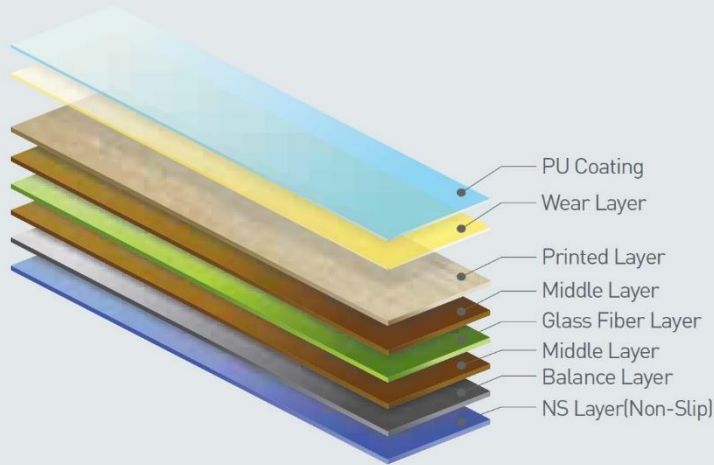

-  High Density PU Coating
-  Application of US EPA approved organic and inorganic hybrid antibacterial agents
-  Recycled Material
-  Various Color / Pattern Design Collection
-  Excellent stability in severe thermal environments with glass fiber layer
-  Easy installation without adhesive
-  Non-slip Function